



## RTX-73F-PU

Dakota Digital RTX Instrument Installation  
For 1973-'79 Ford Pickups, 1978-'79 Ford Broncos

Your new RTX-73F-PU kit includes:

RTX Display



Universal Sender Pack

Buzzer

Installation Manuals

Switch assembly



Ford Speed Adapter




Main Harness


Control Box

### Installation


- 1a. First, you will need to remove the stock gauge cluster. To do so, remove the LIGHTS and WIPER knobs as well as the four (4) Phillips screws on the top edge of the bezel as indicated in the photo. Also, disconnect the wiring and speedometer cable on the back side of the gauge cluster. Retain hardware for reassembly.

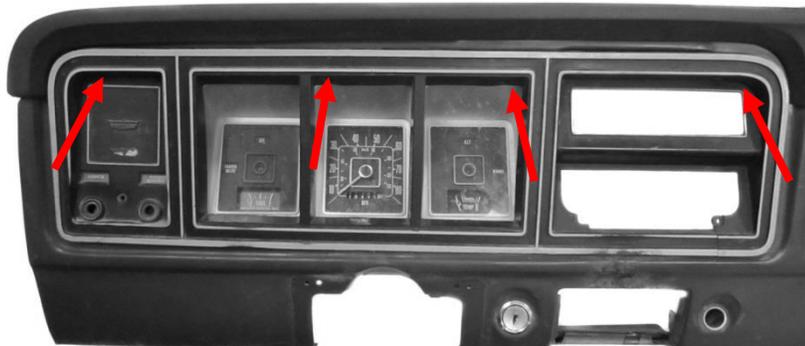

- 1b. Finally, remove the four (4) mounting screws holding the cluster to the dash. Retain these screws for reassembly.

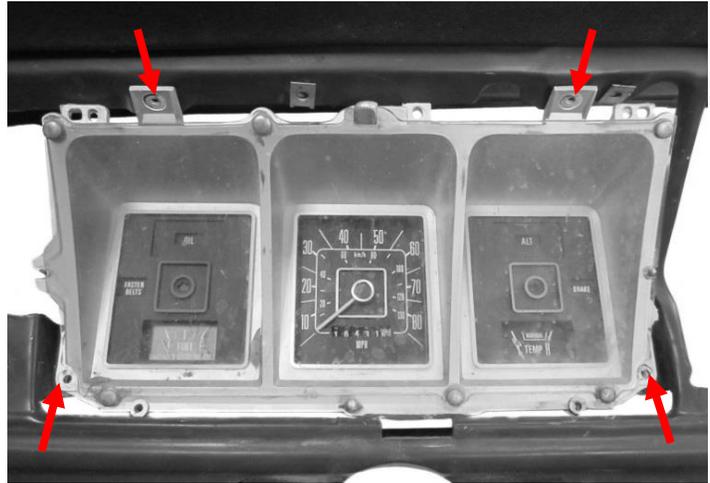


3. Connect the provided main harness and the buzzer (optional for audio feedback) to the back of the RTX system. Route the other end of the main harness to the control box.

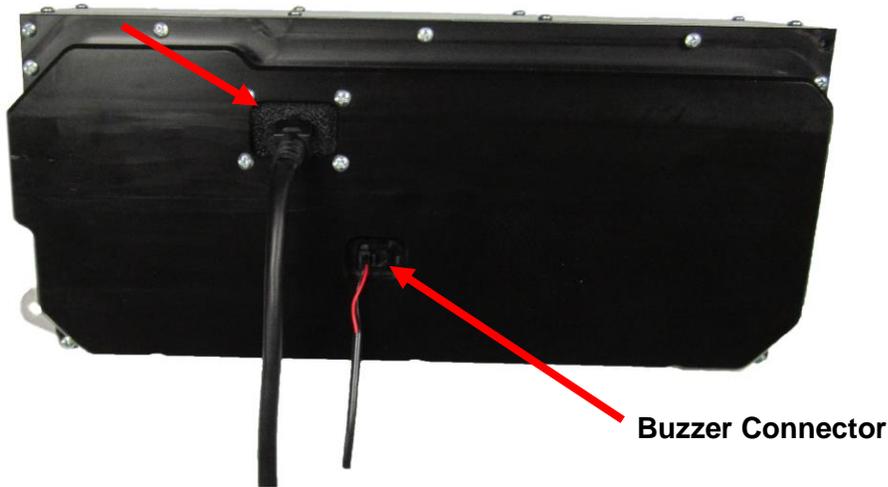

2. Mount the RTX system to the dash using the stock screws. Make sure to partially thread all screws before final torquing to ensure proper alignment for all mounting points.



4. Refer to the main manual for wiring instructions and re-install the stock bezel in reverse order using all stock hardware to complete the RTX installation.

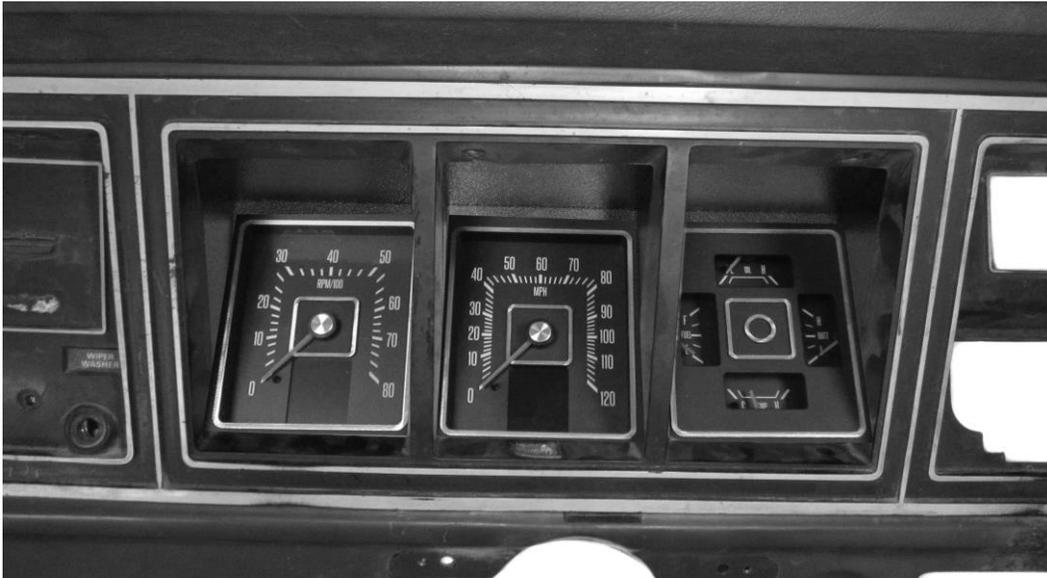

**⚠ WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



4510 W. 61st St. North  
Sioux Falls, SD 57107  
[www.dakotadigital.com](http://www.dakotadigital.com)  
[dakotasupport@dakotadigital.com](mailto:dakotasupport@dakotadigital.com)

Phone (605) 332-6513  
Fax (605) 339-4106

© Copyright 2020 - Dakota Digital